


# MEASURING TRANSDUCERS

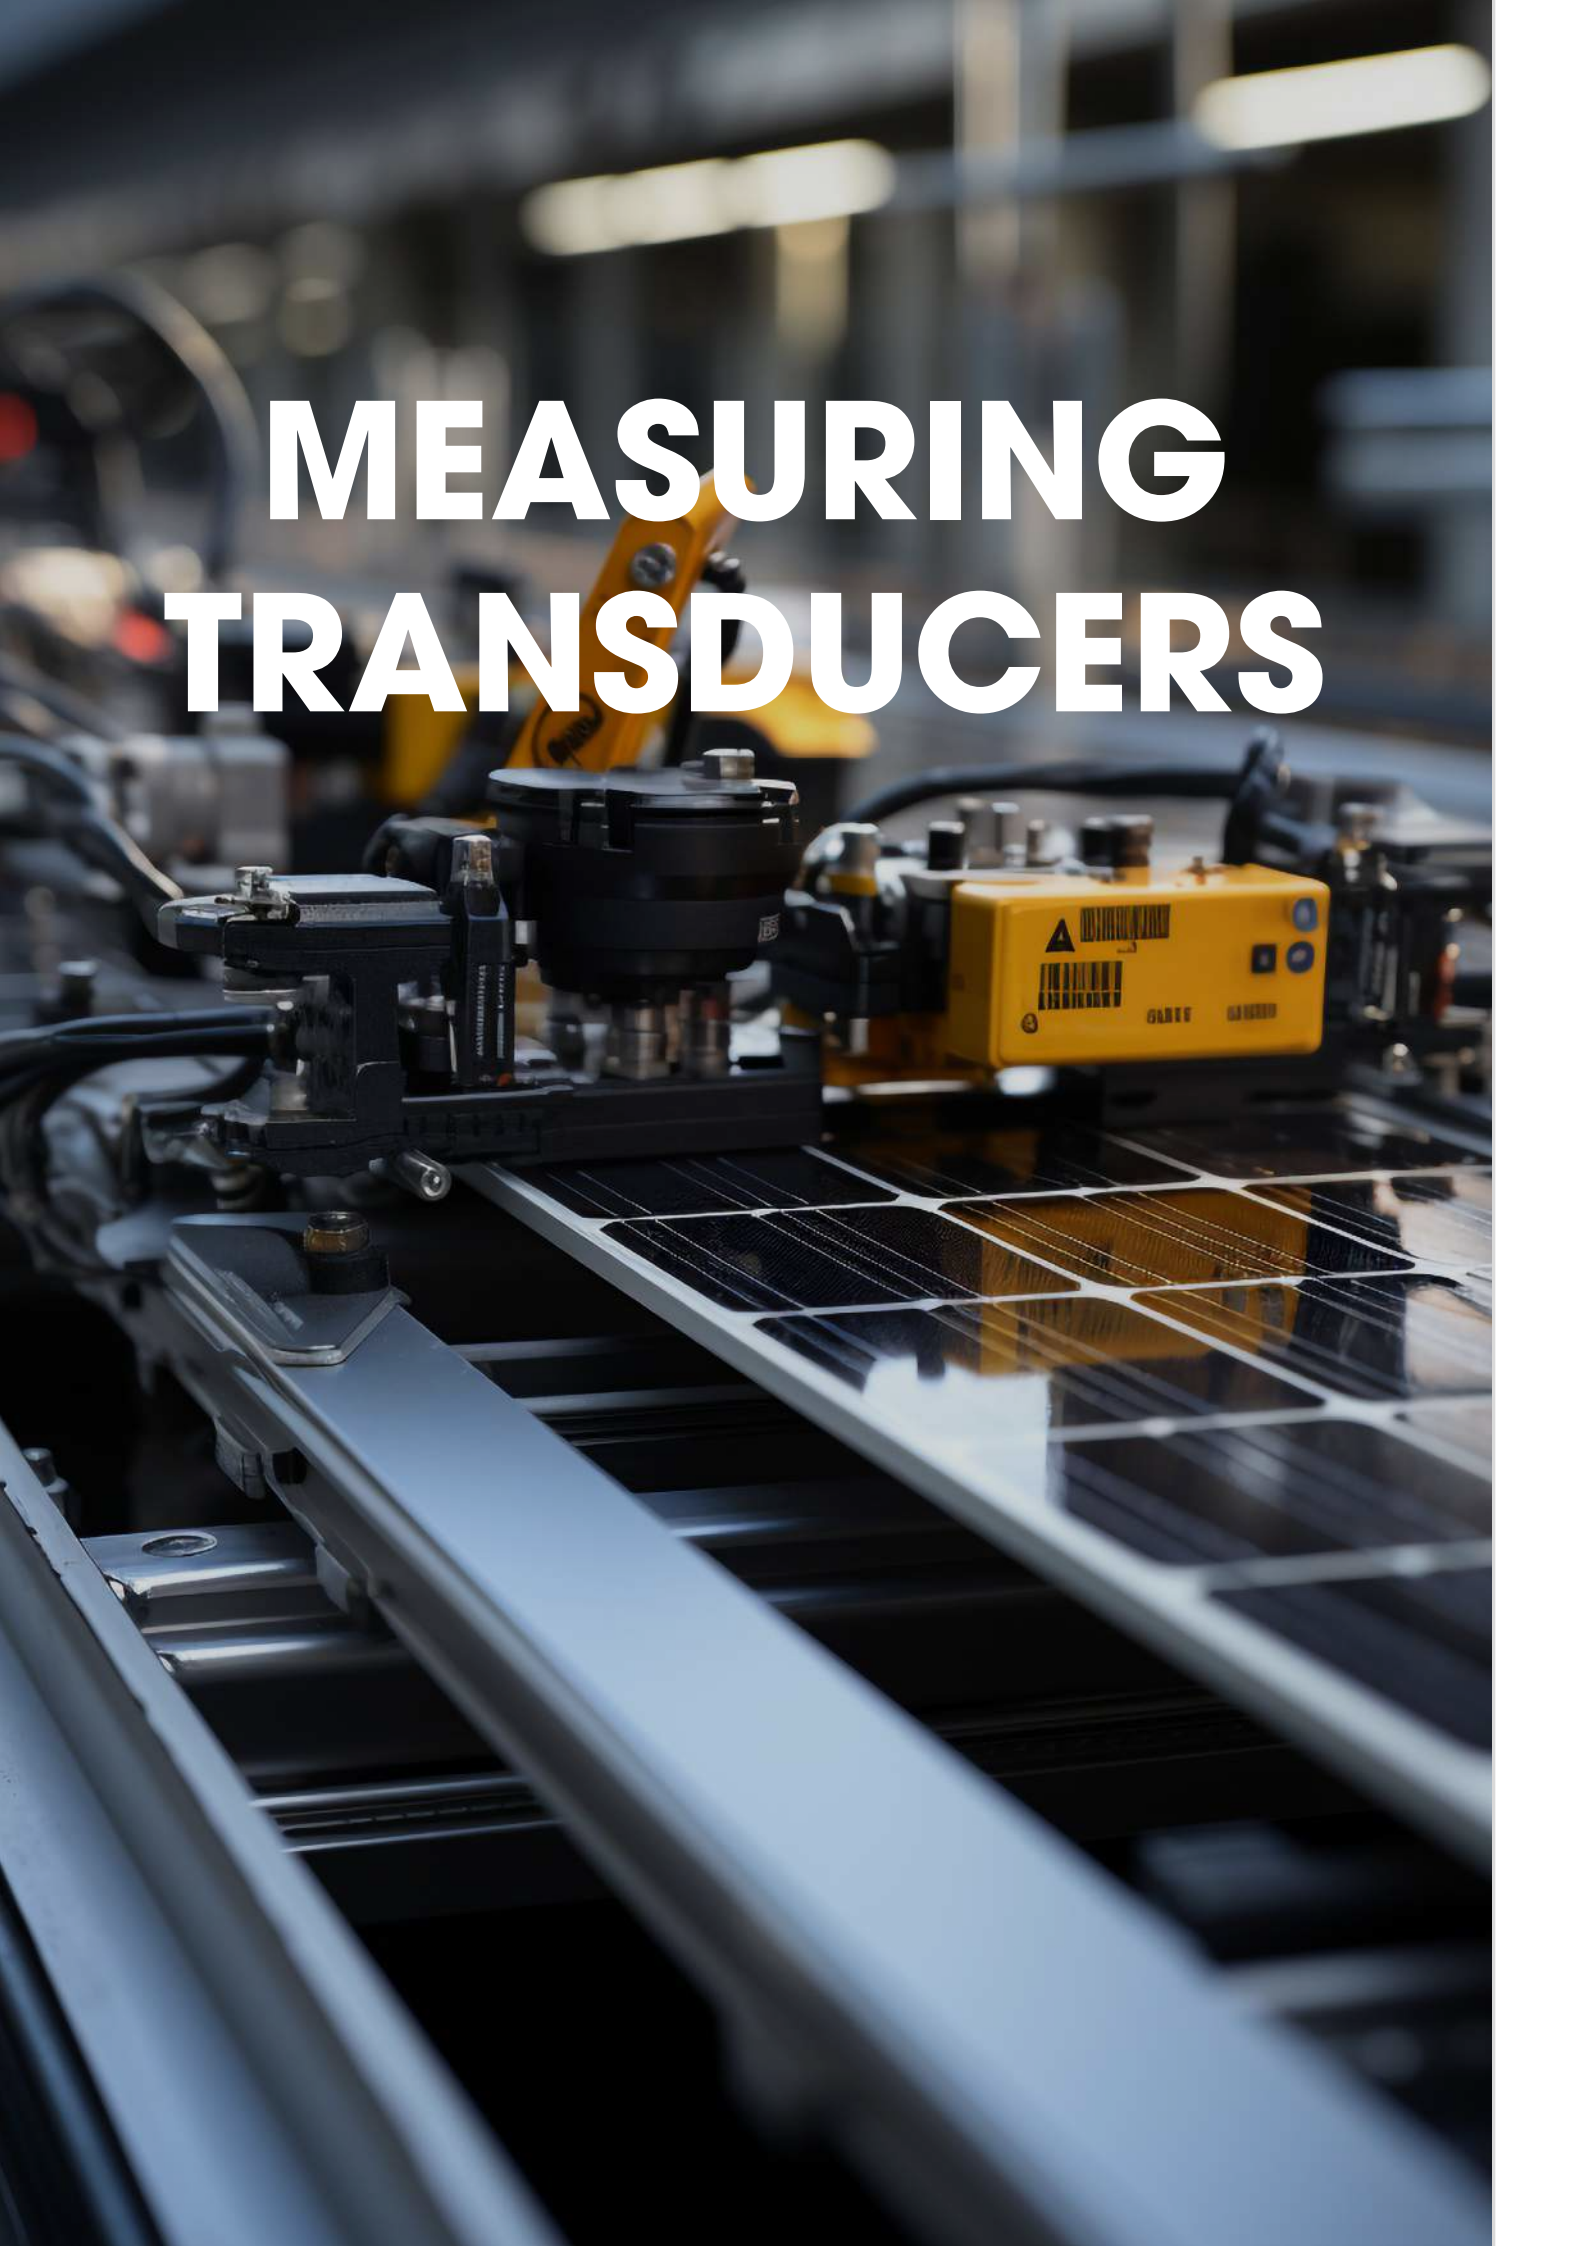

# MEASURING TRANSDUCERS

Measuring transducers	36
ATIP, ATUP measurement transducers	38
CP40 measurement transducers	39
CP_ programmable transducers	40
Permissible THD in transducers	41

# MEASURING TRANSDUCERS

## Measuring transducers



### 1° Input

Input <sup>1</sup>	Type	Outreach
AC current	1	1 or 5 A (.../1 or .../5 A)
AC voltage	2	100, 110, 115, 230, 400 or 440 V
DC current	3	100 µA - 5 A
DC voltage	4	60 mV - 440 V
Frequency Hz	5	50, 60 or 400 Hz

### 2° Output

Output <sup>2</sup>	Type	Outreach
DC current	1	1, 5, 10 or 20 mA
DC current	2	4 - 20 mA
Voltage	3	1 - 5 -10 or 1 - 5 or 2 - 10 V

### 3° Auxiliary voltages

Auxiliary voltages <sup>3</sup>	Type	Outreach
V. Aux. AC	1	115, 230, 400 ± 20% V AC
V. Aux. DC	2	12, 24, 48, 110 or 220 ± 20% V DC



ATL\_

	AC current	Range	Input <sup>1</sup>	Output <sup>2</sup>	Aux. V. <sup>3</sup>	Models
A	Single-phase	0,5 - 1,2 In	1	1	-	ATI
A	Triple, single-phase	0,5 - 1,2 In	1	1	-	ATI3
A	Single-phase	0 - 1,2 In	1	1	-	ATlz
A	Triple, single-phase	0 - 1,2 In	1	1	-	ATlz3
A	Single-phase	0 - 1,2 In	1	1 - 2 - 3	1 - 2	ATIa
A	Triple, single-phase	0 - 1,2 In	1	1 - 2 - 3	1 - 2	ATIa3
A	Bidirectional, single-phase	± 1,2 In	1 - 2	1 - 2 - 3	1 - 2	ATIB
A	Bidirectional, three-phase balanced	± 1,2 In	1 - 2	1 - 2 - 3	1	ATIBI

Other accuracy values on request. Unaffected by frequency variation



ATlca

	DC current	Range	Input <sup>1</sup>	Output <sup>2</sup>	Aux. V. <sup>3</sup>	Models
A	Single-phase	± 0 - 1,2 In	3	1 - 2 - 3	1 - 2	ATlca
A	Single-phase	± 0 - 1,2 In	3	1 - 2 - 3	2	ATlca-a

Other accuracy values on request.



ATU\_

	AC voltage	Range	Input <sup>1</sup>	Output <sup>2</sup>	Aux. V. <sup>3</sup>	Models
V	Single-phase	0,4 - 1,2 Un	2	1	-	ATU
V	Triple, single-phase	0,4 - 1,2 Un	2	1	-	ATU3
V	Single-phase	0 - 1,2 Un	2	1 - 2 - 3	1 - 2	ATUa
V	Triple, single-phase	0 - 1,2 Un	2	1 - 2 - 3	1 - 2	ATUa3

Other accuracy values on request. Unaffected by frequency variation




ATUca

	DC voltage	Range	Input <sup>1</sup>	Output <sup>2</sup>	Aux. V. <sup>3</sup>	Models
V	Single-phase	± 0 - 1,2 Un	4	1 - 2 - 3	1 - 2	ATUca
V	Single-phase	± 0 - 1,2 Un	4	1 - 2 - 3	2	ATUca-a

Other accuracy values on request.

# MEASURING TRANSDUCERS

## Measuring transducers



ATW\_

Active power		Range	Input <sup>1</sup>	Output <sup>2</sup>	Aux. V. <sup>3</sup>	Model
P	Single-phase	0 - 1,2 Pn or ± 1,2 Pn	1 - 2	1 - 2 - 3	1 - 2	ATW
P	Balanced three-phase (3 wire)	0 - 1,2 Pn or ± 1,2 Pn	1 - 2	1 - 2 - 3	1 - 2	ATWI
P	Balanced three-phase (4 wire)	0 - 1,2 Pn or ± 1,2 Pn	1 - 2	1 - 2 - 3	1 - 2	ATWIn
P	Unbalanced three-phase (3 wire)	0 - 1,2 Pn or ± 1,2 Pn	1 - 2	1 - 2 - 3	1 - 2	ATWII
P	Unbalanced three-phase (4 wire)	0 - 1,2 Pn or ± 1,2 Pn	1 - 2	1 - 2 - 3	1 - 2	ATW3

Other accuracy values on request. Not measurable variation with frequency.



ATWr\_

Reactive power		Range	Input <sup>1</sup>	Output <sup>2</sup>	Aux. V. <sup>3</sup>	Model
Q	Single-phase	0 - 1,2 Qn or ± 1,2 Qn	1 - 2	1 - 2 - 3	1 - 2	ATWr
Q	Balanced three-phase (3 wire)	0 - 1,2 Qn or ± 1,2 Qn	1 - 2	1 - 2 - 3	1 - 2	ATWIr
Q	Balanced three-phase (4 wire)	0 - 1,2 Qn or ± 1,2 Qn	1 - 2	1 - 2 - 3	1 - 2	ATWInr
Q	Unbalanced three-phase (3 wire)	0 - 1,2 Qn or ± 1,2 Qn	1 - 2	1 - 2 - 3	1 - 2	ATWIr
Q	Unbalanced three-phase (4 wire)	0 - 1,2 Qn or ± 1,2 Qn	1 - 2	1 - 2 - 3	1 - 2	ATW3r

Other accuracy values on request. Variation with frequency < 0.1 % / Hz.



ATWV\_

Active + reactive power		Range	Input <sup>1</sup>	Output <sup>2</sup>	Aux. V. <sup>3</sup>	Model
P+Q	Single-phase	0 - 1,2 Pn+Qn or ± 1,2 Pn+Qn	1 - 2	1 - 2 - 3	1 - 2	ATWV
P+Q	Balanced three-phase (3 wire)	0 - 1,2 Pn+Qn or ± 1,2 Pn+Qn	1 - 2	1 - 2 - 3	1 - 2	ATWVI
P+Q	Balanced three-phase (4 wire)	0 - 1,2 Pn+Qn or ± 1,2 Pn+Qn	1 - 2	1 - 2 - 3	1 - 2	ATWVIn
P+Q	Unbalanced three-phase (3 wire)	0 - 1,2 Pn+Qn or ± 1,2 Pn+Qn	1 - 2	1 - 2 - 3	1 - 2	ATWVII
P+Q	Unbalanced three-phase (4 wire)	0 - 1,2 Pn+Qn or ± 1,2 Pn+Qn	1 - 2	1 - 2 - 3	1	ATWV3

Other accuracy values on request. Negligible frequency variation in active power, for reactive power < 0.1 % / Hz.



ATF\_

Frequency		Range	Input <sup>1</sup>	Output <sup>2</sup>	Aux. V. <sup>3</sup>	Model
HZ	50 Hz, 60 Hz or 400 Hz	0,9 - 1,1 Fn	2 - 5	1 - 2 - 3	-	ATF
HZ	50 Hz, 60 Hz or 400 Hz	0,1 - 1,2 Fn	2 - 5	1 - 2 - 3	1 - 2	ATFa

Other precision values on request.



ATA\_

Phase angle		Range	Input <sup>1</sup>	Output <sup>2</sup>	Aux. V. <sup>3</sup>	Model
A	Single-phase	-60° - 0 - 60°	1 - 2	1 - 2 - 3	1 - 2	ATA
A	Balanced three-phase	-90° - 0 - 90°	1 - 2	1 - 2 - 3	1 - 2	ATAI
A	Single-phase (between voltages)	-180° - 0 - 180°	2	1 - 2 - 3	1	ATAU

Other accuracy values on request. Variation with frequency not measurable.

Input<sup>1</sup> / Output<sup>2</sup> / Aux. V.<sup>3</sup> (see page 36)

# MEASURING TRANSDUCERS

## Measuring transducers

Resistance and temperature



### General features

Resistance	Range	Input <sup>1</sup>	Output <sup>2</sup>	Aux. V. <sup>3</sup>	Model	
R	0 - 100; 0 - 3000 Ohm	0 - 100 %	Resistance	1 - 2 - 3	1 - 2	ATS2

Other accuracy values on request

Temperature	Range	Input <sup>1</sup>	Output <sup>2</sup>	Aux. V. <sup>3</sup>	Model	
°C	Probe Pt-100 (0 -100; 0-600 °C)	0 - 100 %	Pt100 or Pt1000	1 - 2 - 3	1 - 2	ATS1

Other accuracy values on request

## ATIP, ATUP measuring transducers

RMS. Microprocessor controlled



### General features

Microprocessor-controlled, software-configurable RMS (true RMS measurement of current or voltage) converter.

It has an USB and RS485 serial port with Modbus/RTU protocol.

Measurement parameters	ATIP	ATUP
RSM current	•	
RSM voltage		•

Auxiliar voltage	Range
Universal	40 - 275 V AC/DC

Input features	Range
ATIP	X/5 and X/1 A
ATUP	110 and 230 V

Output features	Range
DC current	0 - 5 or 4 - 20 mA
DC voltage	0 - 10 V
Communication	USB and RS485

# MEASURING TRANSDUCERS

## CP40 measuring transducers

CP42, CP43, CP44



Measurement parameters	CP42	CP43	CP44
Line and phase voltage (RMS)	•	•	•
Current (RMS)	•	•	•
Total and phase active power	•	•	•
Total and phase cosine of $\phi$	•	•	•
Total and phase reactive power	•	•	•
Total and phase apparent power	•	•	•
Frequency	•	•	•

General features	CP42	CP43	CP44
Positive active energy		Digital output	
Inductive and capacitive reactive power		Digital output	
Analog outputs	2	3	4
Pulse / contacts / alarms outputs	2	2	2
Programmable	•	•	•
Analysis / management software	•	•	•

Auxiliary voltage	Range
Universal	40 - 275 V AC/DC

Input features	Range
Rated voltage	110 or 400V
Rated current	X/1 A and X/5 A
Universal auxiliary power supply	40 - 275 V DC/AC
DC auxiliary power	18 - 72 V DC
Frequency	50 or 60 Hz

Output features	Range
Current	0 - 1; 0 - 5; 0 - 10; 0 - 20 or 4 - 20 mA
Voltage	0 - 1; 0 - 5; 0 - 10; 1 - 5 or 2 - 10 V
Serial port	RS 485 and USB

Type	Models	Models	Models
Single-phase	CP42-0	CP43-0	CP44-0
3-phase, 3 wires, balanced	CP42-1	CP43-1	CP44-1
3-phase, 4 wires, balanced	CP42-1A	CP43-1A	CP44-1A
3-phase, 3 wires, unbalanced	CP42-2	CP43-2	CP44-2
3-phase, 4 wires, unbalanced	CP42-3	CP43-3	CP44-3



# MEASURING TRANSDUCCERS

## CP\_ programmable transducers

Class 0,2



Measurement parameters	CP200X	CP300X	CP400x
Line and phase voltage (RMS)	•	•	•
Current (RMS)	•	•	•
Total and phase active power	•	•	•
Total and phase cosine of $\phi$	•	•	•
Total and phase reactive power	•	•	•
Total and phase apparent power	•	•	•
Frequency	•	•	•
Positive active energy	Dig. output	•	•
Inductive reactive energy	Dig. output	•	•
Capacitive reactive energy	Dig. output	•	•
THD current and voltage	-	•	•

General features	CP200X	CP300X	CP400x
Analog outputs	2	3	4
Pulse outputs / contacts / alarms	2	2	2
Programmable	•	•	•
Communication: RS 485 or RS 232* digital output	•	•	•
Analysis / management software	•	•	•

(\*) Both communications in CP300X

Input features	Range
Rated voltage	100, 110, 230, 400 or 440 V
Rated current	X/1 A or X/5 A
AC and DC auxiliary power supply (Universal)	85 - 264 V AC & 90 - 300 V DC
DC auxiliary power	18 - 72 V AC
Frequency	50 or 60 Hz

Output features	Range
Current	0 - 1; 0 - 5; 0 - 10; 0 - 20 or 4 - 20 mA
Voltage	0 - 1; 0 - 5; 0 - 10; 1 - 5 or 2 - 10 V
Serial port	RS 485 or RS 232

Network type	Models
Single-phase	CP2000
Three-phase balanced 3 or 4 wires	CP2001
Three-phase unbalanced 3 wires, 2 systems	CP2002
Three-phase unbalanced 4 wires, 3 systems	CP2003
Single-phase	CP3000
Three-phase balanced 3 or 4 wires	CP3001
Three-phase unbalanced 3 wires, 2 systems	CP3002
Three-phase unbalanced 4 wires, 3 systems	CP3003
Single-phase	CP4000
Three-phase balanced 3 or 4 wires	CP4001
Three-phase unbalanced 3 wires, 2 systems	CP4002
Three-phase unbalanced 4 wires, 3 systems	CP4003

# MEASURING TRANSDUCERS

## Permissible THD in transducers

According to the model

Model	In	Un
<b>Current transducers</b>		
ATI	< 0,5 %	
ATlz	< 0,5 %	
ATI3	< 0,5 %	
ATlz3	< 0,5 %	
ATIa	< 0,5 %	
ATIa3	< 0,5 %	
ATIB	Not affected	
ATIBI	Not affected	
ATIP	Not affected	
<b>Voltage transducers</b>		
ATU		< 0,5 %
ATU3		< 0,5 %
ATUa		< 0,5 %
ATUa3		< 0,5 %
ATUVn		< 0,5 %
ATUP		Not affected
<b>Frequency transducers</b>		
ATF		< 20 %
ATFa		Not affected
<b>Programmable transducers</b>		
ATIP	Not affected	
ATUP		Not affected
CP40	Not affected	Not affected
<b>Active power transducers</b>		
ATW	< 20 %	< 20 %
ATWI	< 20 %	< 20 %
ATWIn	< 20 %	< 20 %
ATWII	< 20 %	< 20 %
ATW3	< 20 %	< 20 %
<b>Reactive power transducers</b>		
ATWr	< 0,5 %	< 0,5 %
ATWlr	< 0,5 %	< 0,5 %
ATWInr	< 0,5 %	< 0,5 %
ATWlIr	< 0,5 %	< 0,5 %
ATW3r	< 0,5 %	< 0,5 %
<b>Combined active and reactive power transducers</b>		
View active and reactive tables		
<b>Phase angle transducers</b>		
ATA		< 20 %
ATAI	< 20 %	< 20 %
ATAU		< 20 %