

Convertidor de medida Measuring Transducer


ATF_



Características - Features


Convertidor de **frecuencia** con posibilidad de incorporar tensión auxiliar en corriente alterna o continua.

Frequency converters with the option of alternating or direct current auxiliary voltage.




Modelo Model	ATF	ATFa
Entradas - Inputs	100 - 110 - 115 - 230 - 400 - 440 V CA - AC	100 - 110 - 115 - 230 - 400 - 440 V CA - AC
Frecuencia - Frequency	50 Hz - 60 Hz - 400 Hz	50 Hz - 60 Hz - 400 Hz
Rango - Range	0,9 - 1,1 Fn	0,9 - 1,1 Fn
T. Aux - Aux. V.	-	115 - 230 - 400 ± 20% V CA - AC 12 - 24 - 48 - 110 // 220 ± 20% V CC - DC
Salidas - Outputs	1 - 5 - 10 - 20 mA 4 - 20 mA 1 - 5 - 10 // 2 - 10 V	1 - 5 - 10 - 20 mA 4 - 20 mA 1 - 5 - 10 // 2 - 10 V


Diagrama de conexión - Connection diagram

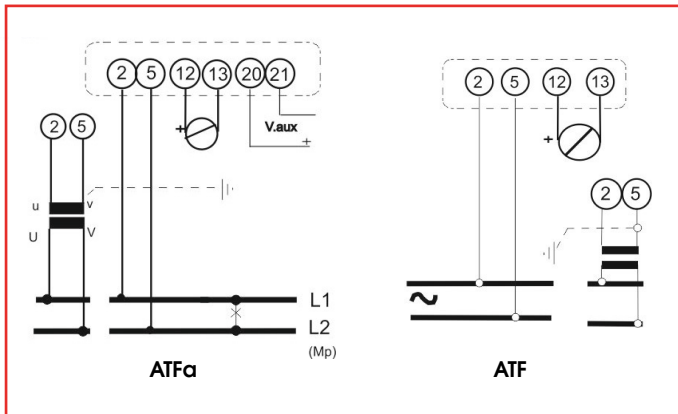

Dimensiones - Dimensions

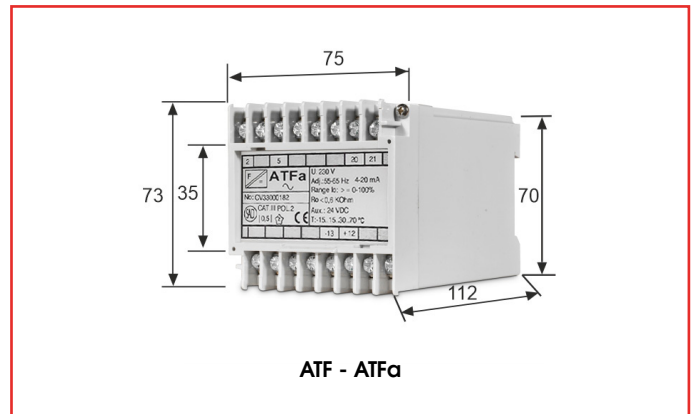

Curvas de transferencia - Transfer curves

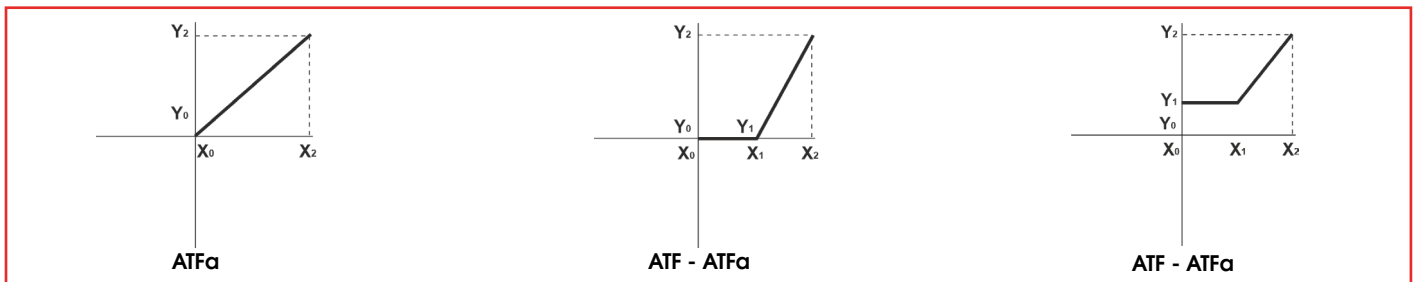

S.A. DE CONSTRUCCIONES INDUSTRIALES

C/ Aragoneses 15 · 28108 Alcobendas · Madrid · España
saci@saci.es · (+34) 91 519 02 45 · www.saci.es