

TU_



Int. dinámica nominal Rated dynamic current	IDyn = 2,5 x Ith
Sobrecarga continua Continuous overload	ID = 1,2 x In
Tensión de servicio (máxima) Rated voltage (maximum)	720V
Tensión de ensayo Test voltage	3 kV AC (1 min)
Int. térmica nominal de cortocircuito (Ith) Rated short - time thermal current (Ith)	60 x In ó Ith limitada por las dim. del cable o la barra de primario 60 x In or Ith limited by cable sizes or primary bus-bar

Modelo - Model	TU20			TU30			TU40		
Barra - Bus-bar	20 x 5			30 x 10			40 x 10		
Cable - Cable	Ø16			Ø22			Ø30		
Precisión - Accuracy class	0,5	1	3	0,5	1	3	0,5	1	3
l _{pn} - l _{pn}	VA			VA			VA		
30			1						
40			1						
50			1					0,75	1,5
60		1	2					1,25	2
75		1,5	2,5					2	3,75
100		2,5	3,75		1,25	2,5	1	3	5
125		3,75	5		1,25	2,5	2,5	3,75	5
150	3,75	5	7,5	1,5	2,5	3,75	3,75	5	7,5
200	5	7,5	10	2,5	3,75	5	3,75	5	7,5
250	7,5	10	15	3,75	5	7,5	5	7,5	10
300				3,75	5	7,5	7,5	10	15
400				3,75	5	7,5	10	15	20
500				5	7,5	10	10	15	20
600				5	7,5	10	10	15	20
750							10	15	20
800							15	20	30
1000							15	20	30

Precisión especial - Special Accuracy


Primario pasante - Bus-bar						
Modelo - Model	TU20			TU40		
Barra - Bus-bar	20 x 5			40 x 10		
Cable - Cable	Ø16			Ø30		
Precisión - Accuracy class	0,5s	0,2	0,2s	0,5s	0,2	0,2s
I _{pn} - I _{pn}	VA			VA		
150	2,5	2,5	2,5			
200	3,75	3,75				
250	5	5				
400				5	5	5
500				5	5	5
600				5	5	5
800				5	5	5
1000				5	5	5

Normas - Standards

- IEC 60185
- IEC 61010
- UNE EN 618691 (IEC 618691)
- UNE EN 618692 (IEC 618692)
- UNE-EN 61000-6-3
- UNE-EN 61000-6-1
- UL94-V0
- VDE 0414
- DIN 57414
- BS 3938




Dimensiones - Dimensions

Dimensiones exteriores - External dimensions

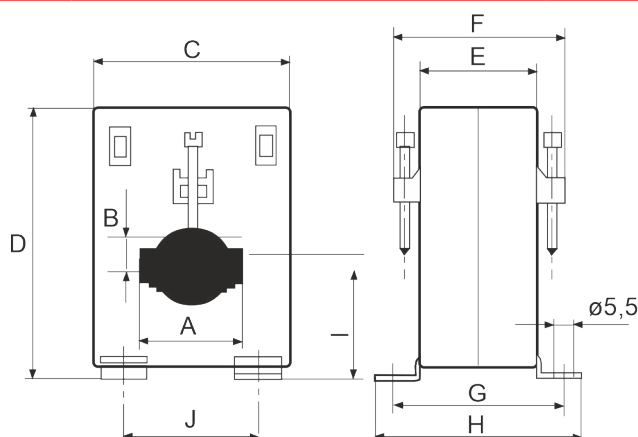

MODELO MODEL	AB*	C	D	E	F	G	H	I	J
TU20	(1)	56	74	33	48,5	48,5	60	32,5	37
TU30	(2)	60	79	36	51,5	51,5	63	34,5	41
TU40	(3)	71	96	45,5	61	61	72,5	44,5	52

*Dimensiones de la ventana - Window dimensions

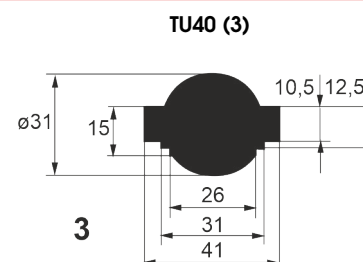

Valores en mm - Values in mm



S.A. DE CONSTRUCCIONES INDUSTRIALES

C/ Aragonese 15 · 28108 Alcobendas · Madrid · España
saci@saci.es · (+34) 91 519 02 45 · www.saci.es